




	<i>Poly-Triplex</i>	<i>Raven Lining Systems</i>	<i>Saureisen</i>	<i>Sealing Systems, Inc.</i>	<i>Remote Orbital Installations</i>	<i>The Strong Company</i>
	<b>PTLS-6800</b>	<b>Raven 404</b>	<b>Saureisen Sewerguard</b>	<b>ElastoGard DLX</b>	<b>Flex-Seal Utility Sealant</b>	<b>Strong-Seal MS-2C</b>
<b>Flexural Strength (ASTM-D 790)</b>	44,535	6,000	4,600	No Data	No Data	700
<b>Tensile Strength (ASTM-D 638)</b>	28,400	4,200	2,500	7,100	1,150	600
<b>Warranty</b>	10 years materials and labor	1 year manufacturer's	Replacement of defective product	None	Replacement of defective product	Limited
<b>Life Expectancy</b>	<b>100 year useful life certification</b>	3-5 year life cycle	3-5 years	3-5 years	3-5 years	5+ years

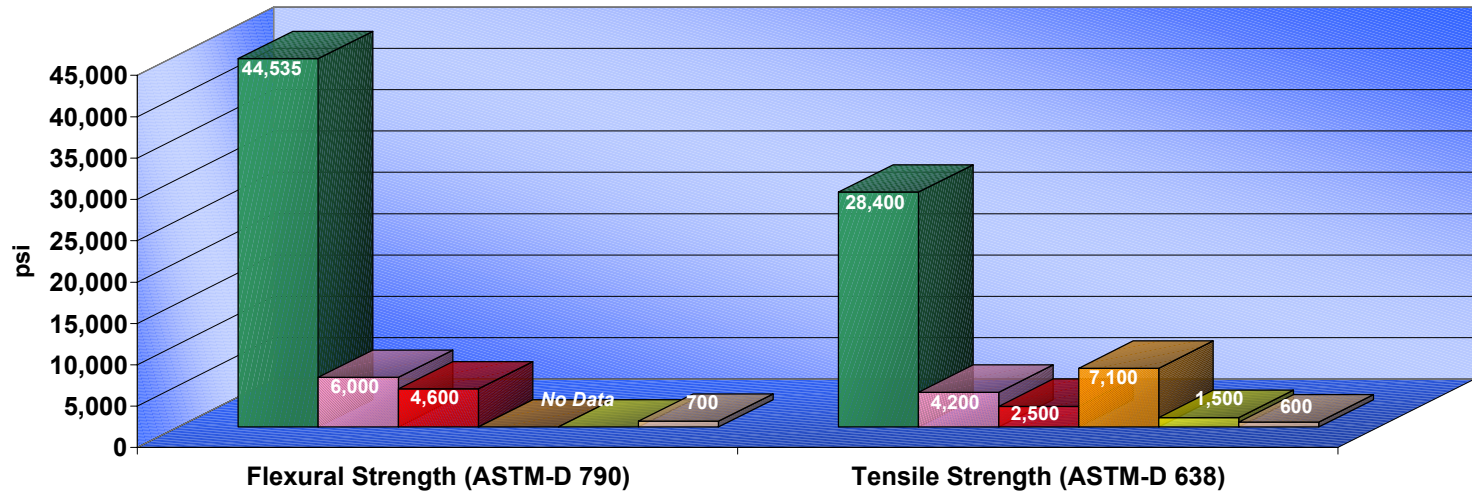

## The Poly-Triplex Difference

A Comparison of infrastructure rehabilitation strength

[www.polytriplexoftx.com](http://www.polytriplexoftx.com)